

Appletless PKI Component Help Document

Contents

Prerequisite.....	2
Steps to install the setup.	2
Steps to uninstall.....	4
Web Browser setting	4


Appletless PKI Component Help Document

Prerequisite


- Java 1.8 or above
- Local system admin rights
 - Note: do not run as “run as administrator”.

Steps to install the setup.

- Click on nCodePKIComponent setup, popup will be shown as below.

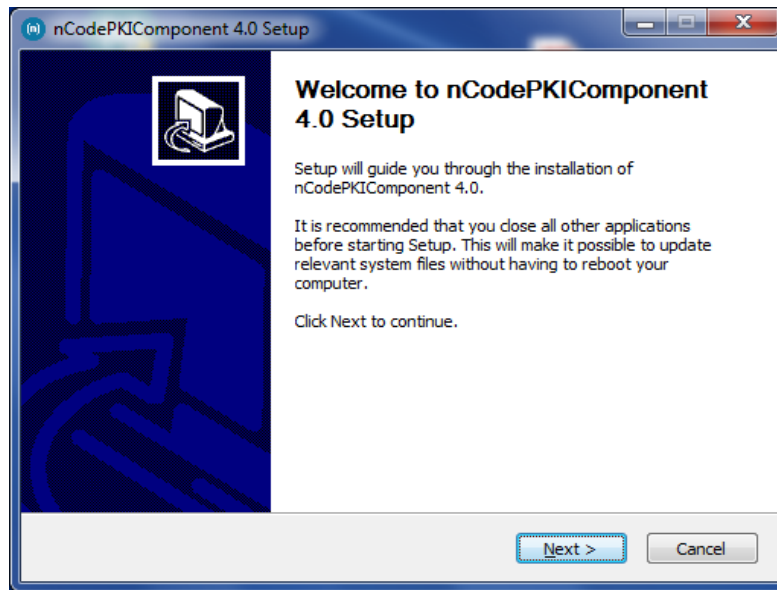


- Click on next, Agree on terms and condition.

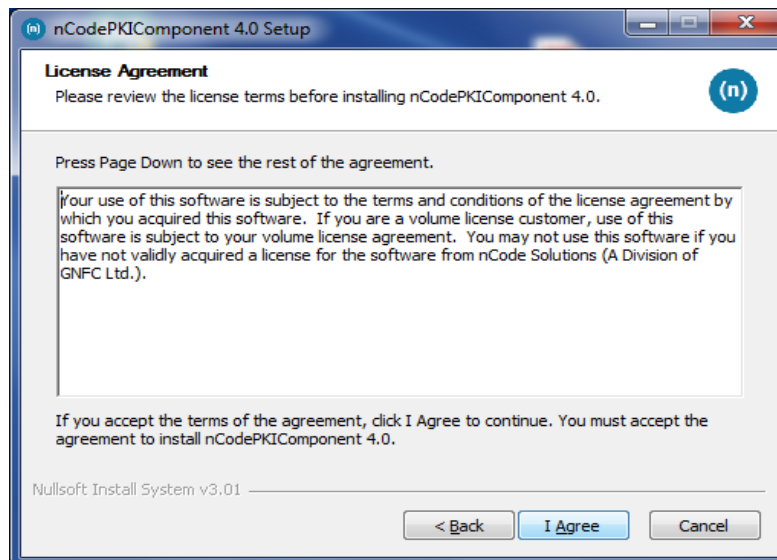


Appletless PKI Component Help Document

- Click on finish.

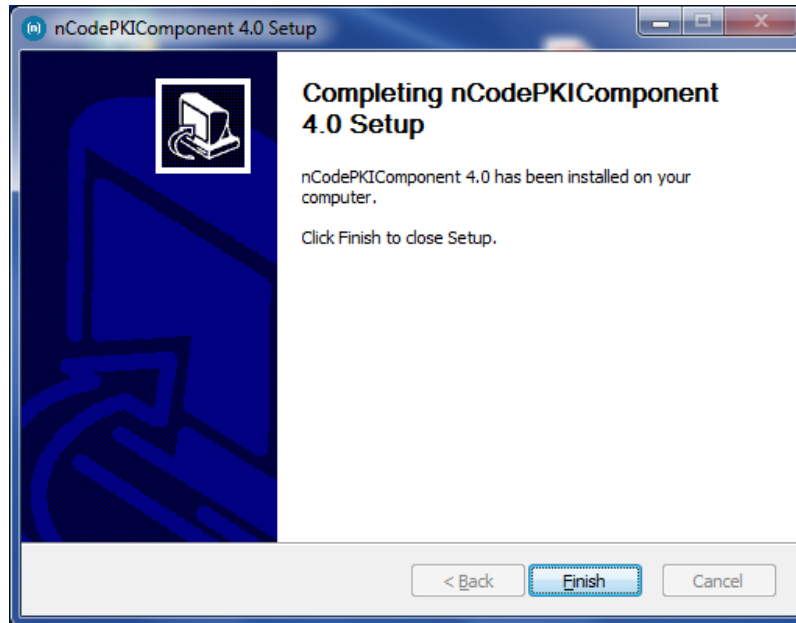

After you click the finish button Applet-less pki component will run automatically and you will get icon in the system tray

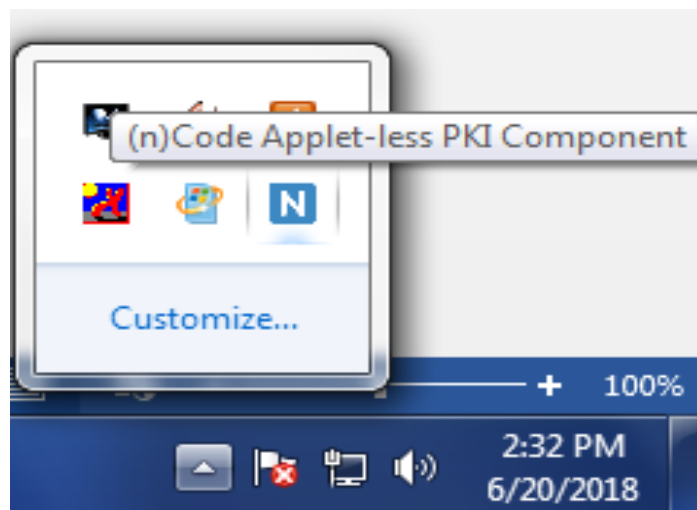

Appletless PKI Component Help Document

Steps to uninstall / re-install

- Go to **control panel** >> **add / remove program** >> search for **nCodePKIComponent V4.0**
- Right click on **nCodePKIComponent V4.0** and
- Select **uninstall / change** which will open a wizard
- Follow wizard to uninstall **nCodePKIComponent V4.0**
- Right click on **Remove_OLD_Settings.bat** (which you have already downloaded with installer) and **run as administrator** to remove configuration if any remaining.
- Install **nCodePKIComponent V4.0** using setup to use it once again

Web Browser setting

- Firefox – Go to URL <https://localhost:13591> and add security exception to allow connections.
 - If connection error still comes, Go to URL **about:config** and set value for **security.mixed_content.block_active_content** to **false** and **security.mixed_content.block_display_content** to **true**.
- Chrome - Go to URL **chrome://flags/#allow-insecure-localhost** and click on **Enable** and restart Chrome to allow connections.
- IE 10 and above - Go to URL <https://localhost:13591> and add certificate to **Trusted Root Certification Authorities** if certificate error comes.